

# **Rockchip RK182X M.2 Module Datasheet**

**Revision 1.0  
Feb. 2026**

### Revision History

Date	Revision	Description
2026-02-05	1.0	Initial Release

Rockchip Confidential

## Table of Content

Table of Content .....	3
Figure Index .....	4
Table Index.....	5
Warranty Disclaimer.....	6
Chapter 1 Introduction .....	7
1.1 Overview .....	7
1.2 Features .....	7
1.3 RK182X M.2 Module Diagram .....	10
1.4 RK182X M.2 Module Typical Application .....	10
Chapter 2 Module Information .....	12
2.1 Module Size.....	12
2.2 External Connector .....	12
2.3 Module Dimension .....	12
2.4 Module Connector Pin Number List.....	12
2.5 Pin Function description .....	13
Chapter 3 Electrical Specification .....	14
3.1 Absolute Ratings .....	14
3.2 Recommended Operating Condition .....	14
3.3 DC Characteristics for GPIO .....	14
3.4 Electrical Characteristics for PCIe -PHY .....	15
Chapter 4 Order Information .....	16

## **Figure Index**

Fig. 1-1 RK182X M.2 Module Block Diagram ..... 10  
Fig. 1-2 RK182X M.2 Module PCIe interface Typical Application Block Diagram..... 11  
Fig. 2-1 RK182X M.2 Module View(include without heat sink and with heat sink) ..... 12

Rockchip Confidential

## **Table Index**

Table 2-1 RK182X M.2 Module Pin Number Order Information .....	12
Table 2-2 Power and System Control Pin Descriptions .....	13
Table 3-1 Absolute ratings.....	14
Table 3-2 Recommended operating condition .....	14

Rockchip Confidential

## Warranty Disclaimer

Copyright © 2026 Rockchip Electronics Co., Ltd. All rights reserved.

No part of this document may be reproduced, transmitted or used in any form or by any means without the written prior consent of Rockchip Electronics Co., Ltd.

### Trademark

Rockchip is a registered trademark of Rockchip Electronics Co., Ltd. in the People's Republic of China and other countries/areas. Other brands, product names mentioned in this document are the property of their respective owners.

### Disclaimer

Rockchip Electronics Co., Ltd. ("Rockchip") may make changes to any information in this document at any time without any prior notice.

Information in this document is provided just as a reference or typical applications. All or part of product features described in this document may not be within the purchase scope or the usage scope, and may be subject to the third-party licensing requirements. All statements, information in this document is provided "AS IS" without warranties of any kind, either express or implied. Actual performance of Rockchip products may vary in different applications. Third party licenses maybe required to use some features supported by Rockchip products. Customers shall be solely and exclusively responsible to obtain all appropriately required third party licenses prior to its such use. Should customers use the features supported by Rockchip products without any required third-party license, customers shall indemnify and hold Rockchip and its subsidiaries, affiliates as well as distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of any claim associated with such unauthorized use.

Rockchip products are not intended for use in military, airplane, medical devices, lifesaving or life sustaining applications ("Unintended Uses"). Customers shall take any and all actions to ensure using Rockchip products in a lawful manner and shall be liable for Unintended Uses.

## Chapter 1 Introduction

### 1.1 Overview

RK182X M.2 Module (Corresponding product name: RM1820MC0 OR RM1828MC0) is a high-performance AI co-processor SoC for machine learning application, especially for Large Language Model(LLM) and Vision Language Model(VLM) related application.

The RK182X M.2 Module is based on the RK182X co-processor(RK182X includes RK1820 and RK1828, RK1820 support 3B large model, RK1828 support 7B large model).

RK182X is based on three 64-bit independent RISC-V cores with FPU. There is a 32KB I-cache, 32KB D-cache and 128KB L2 cache for each core.

The built-in NPU Support INT4/INT8/INT16/FP8/FP16/BF16 hybrid operation and computing power is up to 20TOPS. In addition, with its strong compatibility, network models based on a series of frameworks such as TensorFlow/MXNet/PyTorch/Caffe can be easily converted.

RK182X has an extreme high bandwidth built-in DRAM.

### 1.2 Features

#### 1.2.1 RK182X Co-Processor

- Three RISC-V cores abbreviated as SRV, VRV0 and VRV1
- SRV is implemented with RV64GCB ISA and VRV0/VRV1 is implemented with RV64GCBV ISA
- All cores are integrated FPU with RISC-V H/F/D precision
- Each core has 32KB L1 I-Cache, 32KB L1 D-Cache and 128KB L2 cache
- VRV0 and VRV1 is integrated with 128-bit vector unit

#### 1.2.2 RK182X Memory Organization

- RK182X Internal on-chip memory
  - Bootrom
    - ◆ Support system code download by the following interface:
      - PCIe0 interface
  - 512KB system SRAM
  - Built-in Dynamic Memory Interface
    - ◆ RK1820 Density is 2.5GB
    - ◆ RK1828 Density is 5GB
- RK182X M.2 Module External off-chip memory
  - Combo SDMMC Interface, work at the following mode
    - ◆ eMMC (option)
      - Fully compliant with JEDEC eMMC 4.51 specification
      - Support HS200, but not support CMD Queue
      - Support three data bus width mode: 1bit, 4bits and 8bits

#### 1.2.3 RK182X System Component

- CRU (clock & reset unit)
  - Support total 4 PLLs to generate all clocks
  - One oscillator with 24MHz clock input
  - Support clock gating control for individual components
  - Support global soft-reset control for whole chip, also individual soft-reset for each component
- PMU (power management unit)

- Multiple configurable work modes to save power by different frequency or automatic clock gating control
- Support 3 separate voltage domains  
VDD\_TOP, VDD\_LOGIC, VDD\_PMU
- Timer
  - Support 6 timers with 64bits counter and interrupt-based operation
  - Support two operation modes: free-running and user-defined count for each timer
  - Support timer work state checkable
- Watchdog
  - 32-bit watchdog counter
  - Counter counts down from a preset value to 0 to indicate the occurrence of a timeout
  - WDT can perform two types of operations when timeout occurs:
    - ◆ Generate a system reset
    - ◆ First generate an interrupt and if this is not cleared by the service routine by the time a second timeout occurs then generate a system reset
  - Three Watchdogs
- Interrupt Controller
  - Support 160 interrupt sources input from different components inside SoC for SRV and 64 interrupt sources input for VRV
  - Support 1 software-triggered interrupt in m-mode and s-mode each
  - Input interrupt level is fixed, high-level sensitive
  - Support different interrupt priority for each interrupt source, and they are always software-programmable
- DMAC
  - Support 2 physical channels
  - Support 22 groups of peripheral request interfaces
  - Support 24 logic channels, each logic channel support the following feature
    - ◆ Support the data transfer of memory-to-memory, memory-to-peripherals, peripherals-to-memory
    - ◆ Support Linked list DMA function to complete scatter-gather transfer
    - ◆ Support three kinds of multi-block transfer: contiguous address, auto reload, link list
- Secure System
  - Support one cipher engine
    - ◆ Support Symmetrical algorithms
      - AES-128, AES-192, AES-256, SM4
      - ECB/CBC/OFB/CFB/CTR/CTS/XTS/CCM/GCM/CBC-MAC/CMAC mode for AES and SM4
    - ◆ Hash algorithm
      - SHA-1, SHA-256/224, MD5, SM3 with hardware padding
      - HMAC of SHA-1, SHA-256, MD5, SM3 with hardware padding
    - ◆ Asymmetrical algorithms
      - RSA (up to 4096 bits), ECC (up to 256 bits), SM2
    - ◆ Key-ladder (KL)
      - Support obtaining the root key from OTP or RKRNG and deriving it
      - Support writes out root key or derived key to some specific modules
      - Number of stages can be configured
- Mailbox
  - Twelve mailboxes in SoC used to service different RISC-V communication

### 1.2.4 RK182X JPEG CODEC

- JPEG encoder
  - Supports Baseline (DCT sequential)
  - Supports JPEG file interchange format (JFIF) 1.02
  - Supports image size is from 16x16 to 65520x65520
  - Supports YUV400/YUV420/YUV422/YUV444
- JPEG Decoder
  - Support Baseline (DCT sequential)
  - Support JPEG file interchange format (JFIF) 1.02
  - Support image size is from 48x48 to 65520x65520
  - Support YUV400/YUV420/YUV422/YUV440/YUV411/YUV444/RG888/RGB565

### 1.2.5 RK182X Neural Process Unit

- Rockchip NPU engine:
  - Up to 20 TOPS for INT8
  - Support INT4/INT8/INT16/FP8/FP16/BF16 operation
  - Support deep learning frameworks: TensorFlow, Caffe, Tflite, Pytorch, Onnx NN, Android NN, etc.

### 1.2.6 RK182X 2D Graphics Engine

- 2D Graphics Engine (RGA)
- Data format
  - SRC0 Input data format:
    - ◆ ARGB8888/RGBA8888/RGBA4444/RGBA5551
    - ◆ RGB888P/RGB565
    - ◆ YUV422-P/YUV422-SP-8bit/10bit (clip to 8bit after input)
    - ◆ YUV420-P/YUV420-SP-8bit/10bit (clip to 8bit after input)
    - ◆ YUV444I/YUV444SP-8bit
    - ◆ YVYU422-8bit
    - ◆ YUV400-8bit
    - ◆ TILE4X4 YUV420/422/444-8bit
    - ◆ TILE4X4 YUV420/422/444-10bit (clip to 8bit after input)
    - ◆ BPP1/2/4/8
  - SRC1 Input data format:
    - ◆ ARGB8888/RGBA8888/RGBA4444/RGBA5551/A8
    - ◆ RGB888P/RGB565
  - Output data format (all YUV format is 8bit):
    - ◆ ARGB8888/RGBA8888/ARGB4444/RGBA4444/ARGB5551/RGBA5551
    - ◆ RGB888/RGB565
    - ◆ YUV420/YUV422 P/SP
    - ◆ YUV400/Y4
    - ◆ YUV444SP/444I
  - Pixel Format conversion, BT.601/BT.709
  - Dither operation
  - Max resolution : 8192x8192 source, 4096x4096 destination
- Scaling
  - Down-scaling: Average/Bilinear filter
  - Up-scaling: Bi-cubic filter(source>1992 would use Bi-linear)
  - Arbitrary non-integer scaling ratio, from 1/16 to 16
- Rotation
  - 0, 90, 180, 270-degree rotation
  - x-mirror, y-mirror operation
  - Mirroring and rotation co-operation
- BitBLT
  - Block transfer
  - Color palette/Color fill, support with alpha
  - Transparency mode (color keying/stencil test, specified value/value range)

- Two source BitBLT
- A+B=B only BitBLT, A support rotate & scale when B fixed
- A+B=C second source (B) has same attribute with (C) plus rotation function
- Alpha Blending
  - Comprehensive per-pixel alpha (color/alpha channel separately)
  - Fading
  - Support SRC1(R2Y) +SRC0(YUV) -> DST(YUV)
  - Support DST Full CSC convert for YUV2YUV
- OSD Automatic Inversion
  - Support OSD sources in ARGB8888/ARGB1555/ARGB444/ARGB2BPP format
  - Support SRC0 and OSD overlay

### 1.2.7 RK182X M.2 Module Connectivity interface

- PCIe2.1 interface
  - Compatible with PCI Express Base Specification Revision 2.1
  - Support one lane
  - Support dual mode
  - Support 5.0GT/s serial data transmission rate per lane per direction

### 1.2.8 Others

- Multiple groups of GPIO
  - All of GPIOs can be used to generate interrupt
  - Support level trigger and edge trigger interrupt
  - Support configurable polarity of level trigger interrupt
  - Support configurable rising edge, falling edge and both edge trigger interrupt
  - Support configurable pull direction (a weak pull-up and a weak pull-down)
  - Support configurable drive strength
- OTP
  - Support 8K bits size, 6.5K bits for secure application
  - Support Program/Read/Idle mode

## 1.3 RK182X M.2 Module Diagram

The following figure shows the basic block diagram.

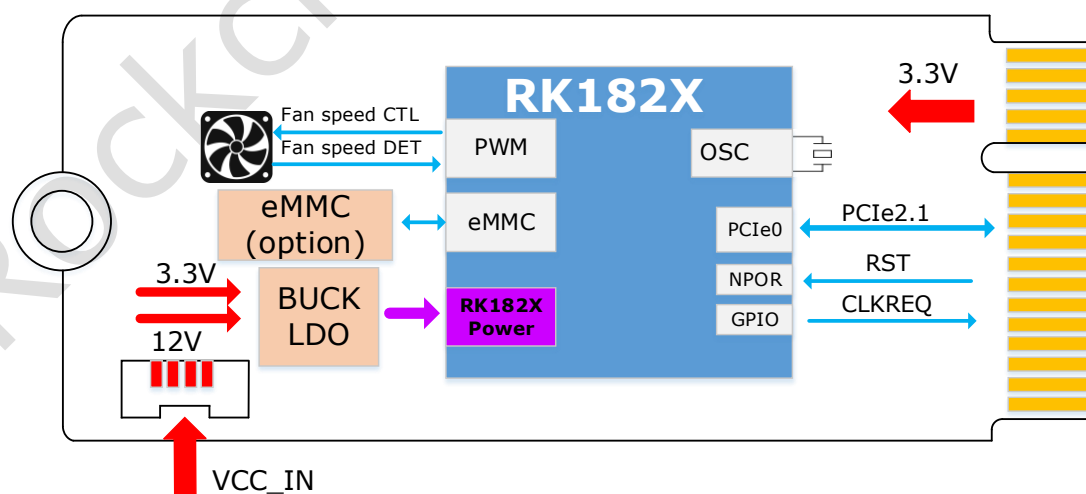


Fig. 1-1 RK182X M.2 Module Block Diagram

## 1.4 RK182X M.2 Module Typical Application

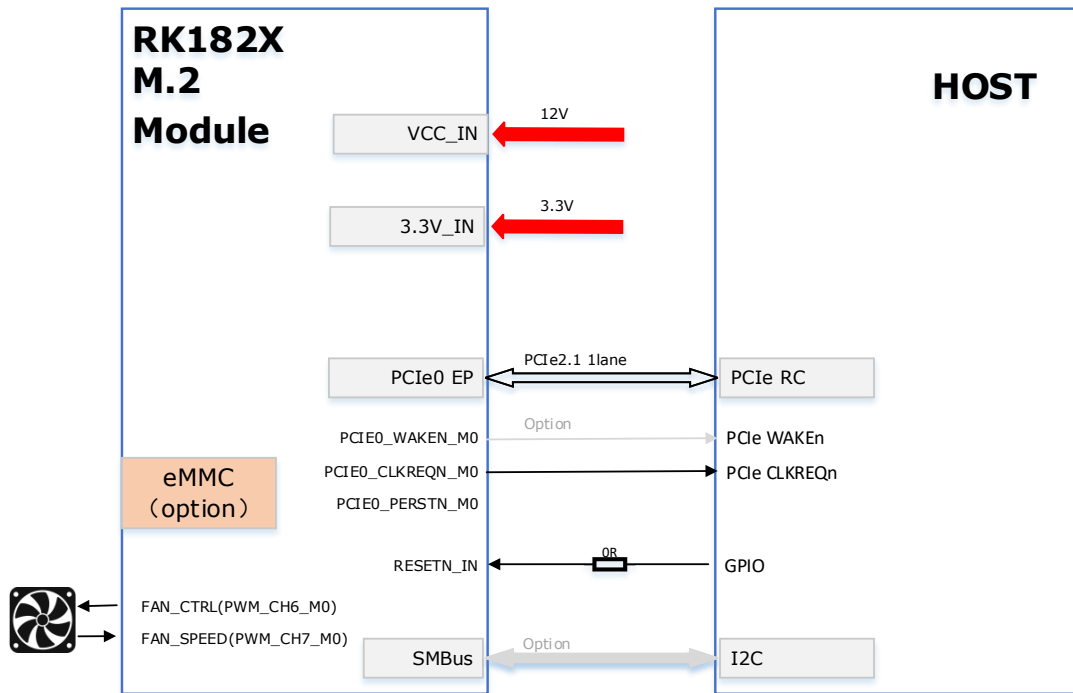


Fig. 1-2 RK182X M.2 Module PCIe interface Typical Application Block Diagram

## Chapter 2 Module Information

### 2.1 Module Size

- 22mm x 80mm

### 2.2 External Connector

- The Module exposes a M.2 Key M connector.

### 2.3 Module Dimension

Note: All dimensions given in millimeter units.

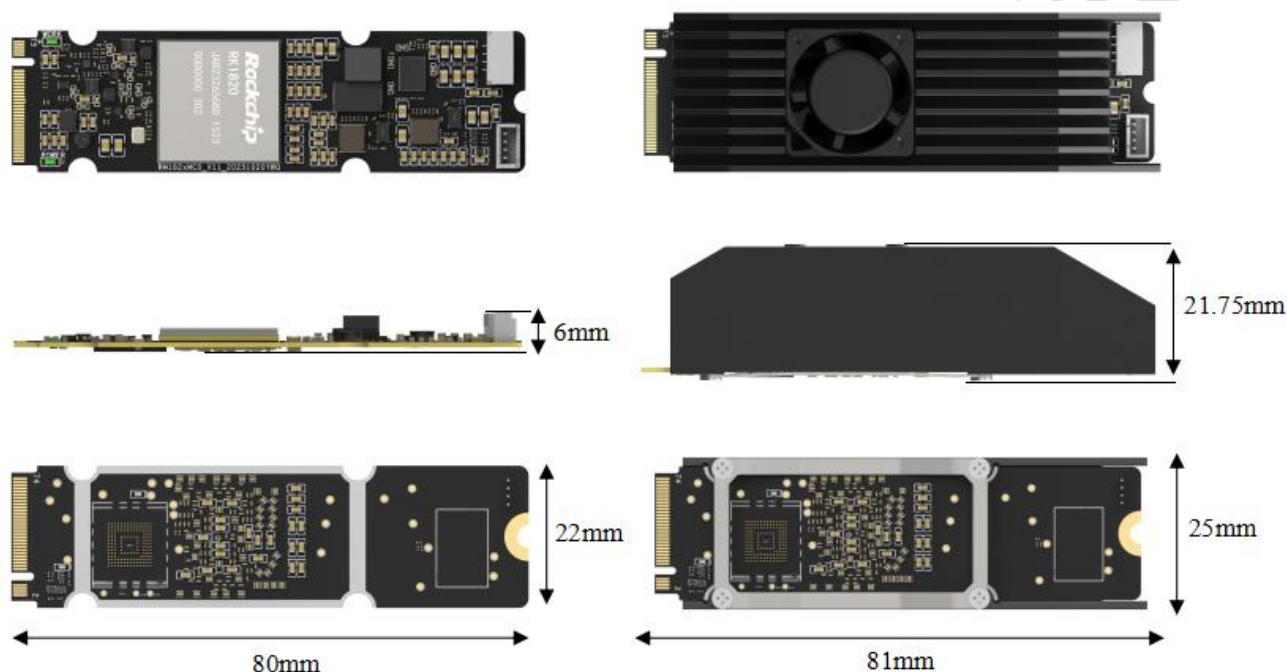


Fig. 2-1 RK182X M.2 Module View (include without fan and with fan)

### 2.4 Module Connector Pin Number List

Table 2-1 RK182X M.2 Module Pin Number Order Information

Pin Name	Pin #	Pin #	Pin Name
GND	1	2	3.3V
GND	3	4	3.3V
PETn3	5	6	PWRDIS(I)(0/1.8/3.3V)
PETp3	7	8	PLN#(I)(0/1.8/3.3V)
GND	9	10	LED_1#(O)(OD)
PERn3	11	12	3.3V
PERp3	13	14	3.3V
GND	15	16	3.3V
PETn2	17	18	3.3V
PETp2	19	20	NC
GND	21	22	VIO 1.8V
PERn2	23	24	NC
PERp2	25	26	NC
GND	27	28	NC
PETn1	29	30	PLA_S3#(O)(0/1.8/3.3V)
PETp1	31	32	GND
GND	33	34	USB_D+
PERn1	35	36	USB_D-
PERp1	37	38	GND
GND	39	40	SMB_CLK(I/O)(0/1.8V)
PETn0	41	42	SMB_DATA(I/O)(0/1.8V)

Pin Name	Pin #	Pin #	Pin Name
PETp0	43	44	ALERT#(O)(0/1.8V)
GND	45	46	NC
PERn0	47	48	NC
PERp0	49	50	PCIE_PERST#(I)(0/1.8/3.3V)
GND	51	52	PCIE_CLKREQ#(IO)(0/1.8/3.3V)
REFCLKN	53	54	PCIE_PEWake#(IO)(0/1.8/3.3V)
REFCLKP	55	56	Reserved for MFG Data
GND	57	58	Reserved for MFG Clock
NC	67	68	SUSCLK(I)(0/1.8/3.3V)
PEDET=NC(PCIE)	69	70	3.3V
GND	71	72	3.3V
VIO_CFG(O)	73	74	3.3V
GND	75		

## 2.5 Pin Function description

See the RK182X M.2 Module Pinout for details on connecting to each of the interfaces.

Table 2-2 Power and System Control Pin Descriptions

Pin#	Signal Name	Description	Direction	Pin Type
2 4 10 14 16 18 70 72 74	3.3V	Main power: Supply provides power to the module.	Input	3.3V
50	PCIE_PERST#(I)(0/1.8/3.3V)	Module Reset. Reset to the module when driven low by HOST.	Input	1.8V/3.3V Domain

Table 2-3 Power and System Control Pin Descriptions

Pin#	Signal Name	Description	Direction	Pin Type
External 4-pin mount	VCC_IN	Main power: Supply provides power to the module.	Input	8V to 14.4V

Table 2-4 PCIe Pin Descriptions

Pin#	Signal Name	Description	Direction	Pin Type
43	PETp0	PCIe transmit differential Positive	Output	Combo PHY
41	PETn0	PCIe transmit differential Negative	Output	Combo PHY
49	PERp0	PCIe receive differential Positive	Input	Combo PHY
47	PERn0	PCIe receive differential Negative	Input	Combo PHY
55	REFCLKP	PCIe differential clock Positive,Support input or output	Bidir	Combo PHY
53	REFCLKN	PCIe differential clock Negative,Support input or output	Bidir	Combo PHY

Table 2-5 GPIO Power Domain Descriptions

Pin#	Signal Name	Power Domain
50	PCIE_PERSTN	Operating Voltage:1.8V/3.3V
52	PCIE_CLKREQN	

## Chapter 3 Electrical Specification

### 3.1 Absolute Ratings

The below table provides the absolute ratings.

Absolute maximum or minimum ratings specify the values beyond which the device may be damaged permanently. Long-term exposure to absolute maximum ratings conditions may affect device reliability.

Table 3-1 Absolute ratings

Parameters	Related Power Group	Min	Max	Unit
Supply voltage for VCC_IN	VCC_IN	-0.3	18	V
Supply voltage for 3.3V	3.3V	-0.3	3.8	V
Max Conjunction Temperature	Tj	NA	105	°C

### 3.2 Recommended Operating Condition

Following table describes the recommended operating condition.

Table 3-2 Recommended operating condition

Parameters	Related Power Group	Min	Typ	Max	Unit	Note
Supply voltage for VCC_IN	VCC_IN	8.0	12.0	14.4	V	1
Supply current for VCC_IN	I <sub>VCC_IN</sub>	2.0	-	4.0	A	
Supply current for 3.3V	3.3V	2.97	3.3	3.63	V	
Storage Temperature	T <sub>stg</sub>	-20	-	70	°C	
Storage relative humidity		30	-	70	%	3
Ambient Operating Temperature	T <sub>a</sub>	-10	25	55	°C	4
Max Conjunction Temperature	T <sub>j</sub>	-	-	95	°C	

Notes:

1. Considering the maximum contact current rating of each contact of M.2 Socket (generally 0.5A), it is recommended that the power supply voltage is 12V. When the power supply capacity can provide more than 40W, each pin should not exceed 0.5A.

The power consumption corresponding to different performance modes, see RK182X M.2 Module Thermal Design Guide for details.

2. By default, it is only used for VCCIO2/VCCIO3 power domain. If external devices also want to use it, the VCC\_IN input power should be increased accordingly.

3. No condensation

4. Customers should consider specific thermal design for the final product based on the specific environment, performance requirements and operational conditions.

### 3.3 DC Characteristics for GPIO

Table 3-3 DC Characteristics for GPIO






Parameters		Symbol	Min	Typ	Max	Unit
Digital GPIO @3.3V	Input Low Voltage	V <sub>il</sub>	-0.3	NA	0.8	V
	Input High Voltage	V <sub>ih</sub>	2.0	NA	VCCIO+0.3	V
	Output Low Voltage	V <sub>ol</sub>	-0.3	NA	0.4	V
	Output High Voltage	V <sub>oh</sub>	2.4	NA	VCCIO+0.3	V
	Pullup Resistor	R <sub>pu</sub>	16	NA	43	Kohm
	Pulldown Resistor	R <sub>pd</sub>	16	NA	43	Kohm
Digital GPIO @1.8V	Input Low Voltage	V <sub>il</sub>	-0.3	NA	0.35*VCCIO	V
	Input High Voltage	V <sub>ih</sub>	0.65*VCCIO	NA	VCCIO+0.3	V
	Output Low Voltage	V <sub>ol</sub>	-0.3	NA	0.4	V
	Output High Voltage	V <sub>oh</sub>	1.4	NA	VCCIO+0.3	V
	Pullup Resistor	R <sub>pu</sub>	16	NA	43	Kohm
	Pulldown Resistor	R <sub>pd</sub>	16	NA	43	Kohm


### 3.4 Electrical Characteristics for PCIe -PHY

Table 3-4 Electrical Characteristics for PCIe PHY

Parameters	Symbol	Condition	Min	Typ	Max	Unit
Transmitter						
Differential p-pTx voltage swing	$V_{TX-DIFF-PP}$		0.8	NA	1.2	V
Low power differential p-p Tx voltage swing	$V_{TX-DIFF-PP-LOW}$		0.4	NA	1.2	V
Tx de-emphasis level ratio	$R_{TX-DIFF-DC}$		80	NA	120	ohm
Single Ended Output Resistance Matching	$R_{TX-DC-OFFSET}$		NA	NA	5	%
The amount of voltage change allowed during Receiver Detection	$V_{TX-RCV-DETECT}$		NA	NA	600	mV
Output rising time for 20% to 80%	$T_r$		25	NA	NA	ps
Output falling time for 20% to 80%	$T_f$		25	NA	NA	ps
AC Coupling Capacitor(USB3.0/PCIE)	$C_{TX}$		75	NA	200	nF
Receiver						
Unit Interval	UI		399.88	NA	400.12	ps
Input Voltage Swing	$V_{rxdpp-c}$		250	NA	1200	mV
Input differential impedance	$R_{rxd-c}$		80	NA	120	ohm
Single Ended input Resistance Matching	$T_{rxd-c-ms}$		NA	NA	5	%

Chapter 4 Order Information

Product Model	Description	HS Code	RoHS Status	MSL <sup>®</sup>	Package Quantity	Unit Net Weight (g)
RM1820MC0	RM1820MC0 Module without Fan	8473309000	RoHS	MSL3	Unit per anti-static tray: 10 pcs  Unit per inner box: 2 trays, 20 pcs	12.04
RM1828MC0	RM1828MC0 Module without Fan		RoHS	MSL3	 Unit per box: 24 inner boxes, 480 pcs 	12.04
RM1820MC0-F	RM1820MC0 Module with Fan		RoHS	MSL3	Unit per anti-static tray: 10 pcs  Unit per inner box: 2 tray, 20 pcs	56.3
RM1828MC0-F	RM1828MC0 Module with Fan		RoHS	MSL3	 Unit per box: 12 inner boxes, 240 pcs	56.3

							
--	--	--	--	--	--	---	--

Rockchip Confidential